



# The Water O<sub>3</sub>zonator

Model WOZ2 Manual

## CONTENTS

WELCOME TO SOTA .....	2
BEFORE USING .....	2
LEARN MORE .....	2
COMPLETE UNIT INCLUDES.....	2
DO NOT USE.....	3
CAUTIONS .....	3
HOW TO USE THE WATER OZONATOR .....	3
How to Assemble .....	3
Ozonating Water .....	4
Typical Use.....	5
ELECTRICAL SPECIFICATIONS .....	5
REPLACEMENT ACCESSORIES .....	6
WARRANTY .....	6
REPAIRS.....	6

## WELCOME TO SOTA

Thank you for allowing us to be a part of your wellness team.

The Water Ozonator is a consumer product designed to be used as part of a Wellness Lifestyle. A commitment to healthy lifestyle choices is an important factor in the journey to Wellness.

The SOTA Water Ozonator produces freshly-ozonated water. The fresh taste and extra oxygen are an energizing way to hydrate your body.

The Water Ozonator is designed to be used independently, but can also be used together with any of the SOTA Products.

With proper care, your Water Ozonator should provide you many years of trouble-free use.

Please understand that results will vary.

## BEFORE USING

Please read the manual thoroughly before using your Water Ozonator.

We've made every effort to ensure the information in your manual is up-to-date at the time of printing ... since that time however, new information may have become available. For the most up-to-date manual, please visit our website [www.sota.com/manuals](http://www.sota.com/manuals).

## LEARN MORE

To learn more about the Water Ozonator we invite you to visit the SOTA website:

**[www.sota.com](http://www.sota.com)**

The website offers Videos, Frequently Asked Questions, *The SOTA Wellness Program Guide*, SOTA News ... and more.



## COMPLETE UNIT INCLUDES

- One (1) WOZ2 Ozone Generator Unit
- One (1) XP-550 UL Aquarium Air Pump
- One (1) Brass Check (One-way) Valve
- One (1) Airstone

- One (1) 4 Foot Length of Silicone Tubing
- Two (2) 6 Inch Lengths of Silicone Tubing
- Two (2) Plastic Ties
- One (1) Wall Adapter
- One (1) Product Manual

## DO NOT USE

1. As with all electrical products do not use near water, when driving a car or when operating heavy equipment.

## CAUTIONS

1. Avoid breathing the ozone directly from the Airstone as it may irritate lung tissue. Use in a well-ventilated area, such as under a stove top exhaust fan.
2. Do not leave the unit unattended while it is on.
3. While this technology is generally considered safe, there exists potential for rare individual reactions that cannot reasonably be foreseen. Therefore, your use of the SOTA Products constitutes your agreement that you are responsible for your decision to use the technology and that you hold SOTA harmless for any injuries or damage believed to arise from using the SOTA Products.


## HOW TO USE THE WATER OZONATOR

### HOW TO ASSEMBLE

1. Connect one end of the first 6 inch length of Silicone Tubing to the AIR OUTLET of the XP-550 UL Aquarium Air Pump.

Note: To make it easier to connect, dip the end of the silicone tubing in water. The silicone tubing will then slip on easier.

2. Connect the other end to the AIR INLET side of the Brass Check (One-way) Valve.

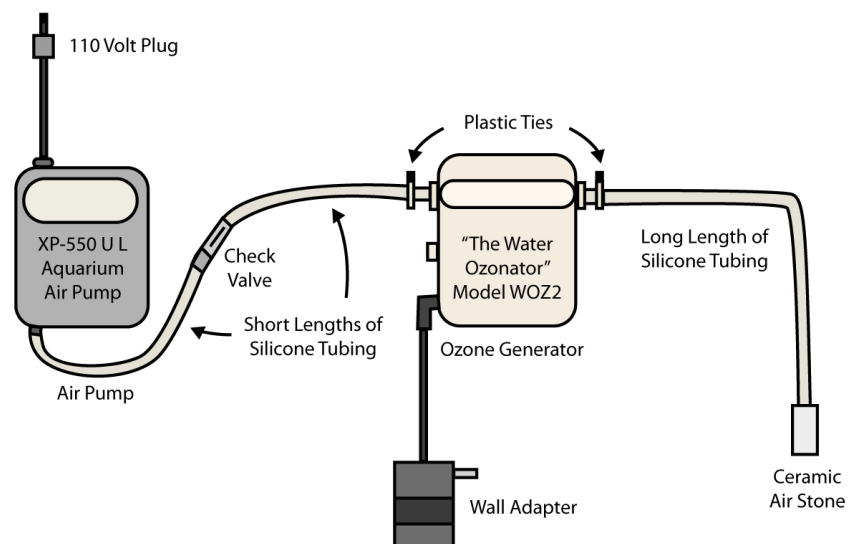

3. Connect one end of the second 6 inch length of Silicone Tubing to the AIR OUTLET of the Brass Check (One-way) Valve. Connect the other end to the AIR INLET of the Ozone Generator Unit.
4. Connect one end of the 4-foot length of the Silicone Tubing to the AIR OUTLET of the Ozone Generator. Connect the other end to the Airstone.
5. Using the 2 Plastic Ties, secure the Silicone Tubing connections on the Ozone Generator. This will prevent Ozone Gas and air from leaking.

## OZONATING WATER

1. Submerge the Airstone, attached to the Silicone Tubing, in a glass container of water. Use a glass or stainless steel container as they are ozone resistant.
  - a. Chilled water holds more ozone but room temperature water is healthier for the stomach.
  - b. It is important to place the water with submerged airstone in a well-ventilated area, as concentrated ozone in air may irritate lung tissue. For example, under a stove-top fan. Place the container of ozonating water well away from the ozone unit.

Note: Ozonating liquids other than water may clog the airstone and will void the warranty on the airstone.



2. Plug in the XP-550 UL Aquarium Air Pump.
3. Plug the Wall Adapter into the Ozone Generator.

WARNING: Do not power the Ozone Generator without the XP-550 UL Aquarium Air Pump running.
4. Check to be sure fine bubbles pass out of the Airstone into the water. If you do not see any bubbles, review the assembly instructions for possible errors. As the unit operates, you should catch the smell of ozone.
5. A high-pitched whine should be heard from the Ozone Generator Unit. This indicates the Ozone Generator Unit is powered.

Note: To hear the change in the intensity of whine, move the selector switch on the Ozone Generator Unit from HIGH to LOW while it is running and then back to HIGH.

6. To turn OFF, unplug the Ozone Generator unit, then the XP-550 Aquarium Air Pump.

Allow water to drain from the tubing after use. This ensures water will not drain back into the unit.

7. Use the freshly ozonated water *immediately* for optimal results. If left for 20 minutes in open air, the ozone dissipates out of the water. You can still experience benefits if you store ozonated water in a glass or stainless steel container with a lid and drink it throughout the day.

### Notes:

**Temperature of Water:** Chilled water holds more ozone, however room temperature water is healthier for the stomach.

**Storage:** Larger quantities of ozonated water can be stored in a glass or stainless steel container with an air-tight lid. The amount of ozone in the water will continue to dissipate, eventually leaving no ozone in the water.

### TYPICAL USE

**Wellness Program:** To use as part of the *SOTA Wellness Program* the Guide is available at: [www.sota.com/wellness](http://www.sota.com/wellness)

#### General Use:

- **Quantity:** Start with 8 ounces (250 ml) per day preferably in the morning. Increase the amount you drink by 8 ounces (250 ml) every second day until you reach 32-64 ounces (1-2 liters) per day. It is best to drink ozonated water on an empty stomach.
- **Length of Use:** We suggest following the SOTA Wellness Program for 6 to 12 months. Being consistent with drinking Ozonated Water is the key to getting results.

### ELECTRICAL SPECIFICATIONS

#### POWER REQUIREMENTS

##### Ozone Generator

11 - 16 Volts DC @ ~ 700 mA, **Tip or Center Negative.**

**Caution:** Exceeding the voltage rating or reverse connection may result in injury or unit failure. This will **void** the warranty.

## **XP-550 UL Air Pump**

120 Volts AC, 60 Hz, 4 Watts

## **OPTIONAL BATTERY OPERATED AIR PUMP**

An SA-B10 Battery Air Pump can be used instead of the XP-550 UL Air Pump. The optional Air Pump is operated from 2 X "D" Alkaline Batteries.

## **OUTPUT SPECIFICATIONS**

Outputs 25 mg/Hr O<sub>3</sub> on HIGH setting.

XL-550 UL Air Pump outputs 3.5 PSI pressure 2 LPM (2000 cc/min) volume.

## **OZONE GENERATOR CONSTRUCTION**

Uses replaceable stainless steel ozone chamber.

## **REPLACEMENT ACCESSORIES**

To replace your accessories, please contact your supplier.

## **WARRANTY**

The Water Ozonator Model WOZ2 is covered by a two (2) year parts and labor warranty on all internally mounted components. Please keep proof of purchase. Warranty is void if the failure is due to abuse or negligence.

## **REPAIRS**

Please contact your supplier for return instructions. For information about your closest repair depot, contact [repairs@sota.com](mailto:repairs@sota.com) or call 1.250.770.2023 or 1.800.224.0242 (toll-free in Canada & USA).

Designed, Engineered and Made in Canada.