

*Instructions for SOTA  
Water Ozonator Model WOZ4*



**CONTENTS**

INTRODUCTION ..... 2

LEARN MORE ..... 2

COMPLEMENTARY UNITS ..... 2

COMPLETE UNIT INCLUDES..... 2

DO NOT USE..... 3

CAUTIONS ..... 3

SUMMARY OF LIGHTS ..... 3

HOW TO USE THE WATER OZONATOR ..... 3

    Typical Use ..... 5

TIMING TO SATURATE WITH OZONE ..... 5

STERILIZING WATER..... 5

WATER DISINFECTION TESTS ..... 6

ELECTRICAL SPECIFICATIONS ..... 6

    Power Requirements..... 6

    Optional Power Input..... 6

    Output Specifications..... 6

    Ozone Generator Construction ..... 6

REPLACEMENT ACCESSORIES ..... 6

WARRANTY ..... 7

REPAIRS..... 7

• The SOTA units are consumer products designed to be used as part of a Wellness Lifestyle • The SOTA units are not medical devices nor are they intended to diagnose, treat or cure any medical or health condition • The use, safety or effectiveness of the SOTA units has not been approved by any government agency • Please consult a health practitioner for any medical or health condition. • Results using the SOTA Products will vary for each person. • Please note that all purchases of SOTA Products are deemed to be made in Penticton, BC, Canada •





## INTRODUCTION

Thank you for allowing us to be part of your wellness team. The Water Ozonator is a consumer product designed to complement a healthy lifestyle.

This unit is designed to freshly ozonate and increase the oxygen content of water, using ambient air. The Water Ozonator is not intended for use with pure oxygen.

Please understand that results will vary. Healthy lifestyle choices are important.

Please read this manual carefully before using the Water Ozonator. The information in this manual is subject to change. For the most up-to-date manual, please visit [www.sota.com](http://www.sota.com). We encourage you to become well-informed about the use of freshly ozonated water.

The SOTA Water Ozonator is built to give you many years of trouble-free use.

## LEARN MORE

To learn more about the Water Ozonator we invite you to visit the SOTA website:

[www.sota.com](http://www.sota.com)

The website offers How to Videos, Frequently Asked Questions, *The SOTA Products User Guide*, SOTA News ... and more.



## COMPLEMENTARY UNITS

The Water Ozonator offers one part of the 4-part SOTA Protocol:

1. The Silver Pulser for Micropulsing.
2. The Magnetic Pulser for Pulsed Magnetic Fields.
3. The Silver Pulser for making Ionic~Colloidal Silver.
4. The Water Ozonator for freshly Ozonated Water.

## COMPLETE UNIT INCLUDES

- One (1) Water Ozonator Unit
- One (1) Ceramic Airstone and Tubing Set
- One (1) Wall Adaptor
- One (1) Product Manual




## DO NOT USE

1. As with all electrical products do not use near water, when driving a car or when operating heavy equipment.

## CAUTIONS

1. Avoid breathing the ozone directly from the Airstone as it may irritate lung tissue. Use in a well-ventilated area, such as under a stove top exhaust fan.
2. Do not operate the unit without the built-in air pump running. If the air pump is not running there will be no bubbles coming from the airstone.
3. Do not leave the unit unattended while it is on.
4. While this technology is generally considered safe, there exists potential for rare individual reactions that cannot reasonably be foreseen. Therefore, your use of the SOTA Products constitutes your agreement that you are responsible for your decision to use the technology.

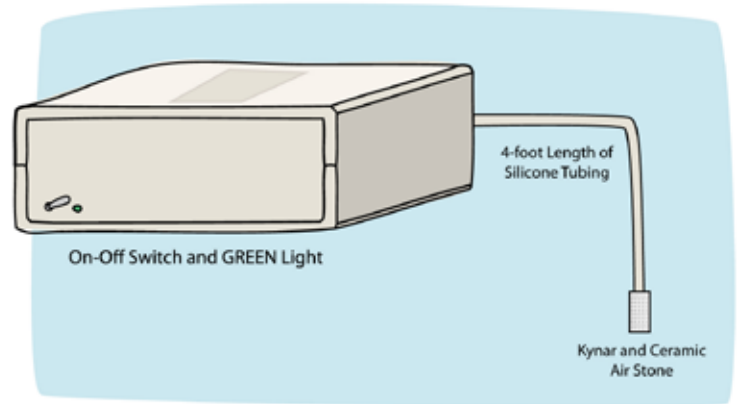

## SUMMARY OF LIGHTS

GREEN: Indicates the unit is on.

## HOW TO USE THE WATER OZONATOR

1. Insert the power plug from the AC-DC Wall Adaptor into the unit and plug the adaptor into an electrical outlet.
2. Connect the silicone tubing to the air outlet pipe on the back of the Water Ozonator.

Note: To make it easier to connect, dip the end of the silicone tubing in water. The silicone tubing will then slip on easier.

3. Submerge the Ceramic Airstone, attached to the silicone tubing, in a glass container of water. Use a glass container as glass is ozone resistant.
  - a. Chilled water holds more ozone but room temperature water is healthier for the stomach.



b. It is important to place the water with submerged airstone in a well-ventilated area, as concentrated ozone in air may irritate lung tissue. For example, under a stove-top fan. Place the container of ozonating water well away from the ozone unit.

Note: Ozonating liquids other than water may clog the airstone and will void the warranty on the airstone.

4. Move the toggle switch to the ON position. The GREEN light will come on.
5. Check to be sure fine bubbles pass out of the Ceramic Airstone into the water. If you do not see any bubbles, ensure the silicone tubing is firmly attached to the air outlet on the side of the unit. As the unit operates, you should catch the smell of ozone.
6. For an 8 ounce or 250 ml cup of water, ozonate for about 2 minutes.



Note: Refer to Timing to Saturate with Ozone below for other volumes of water.

7. To turn OFF, move the toggle switch to the OFF position.

Allow water to drain from the tubing after use. This ensures water will not drain back into the unit.

8. Use the freshly ozonated water *immediately* for optimal results. If left for 20 minutes in open air, the ozone dissipates out of the water. The benefits of the extra oxygen will no longer be present.
9. Turn the unit off and *unplug the wall adaptor* when not in use.

#### Notes:

**Storage:** Larger quantities of ozonated water can be stored in a glass container with an air-tight lid. The amount of ozone in the water will continue to dissipate, eventually leaving no ozone in the water.

**Pump:** If built-in air pump stops running, turn unit off and contact your closest repair depot. See page 7.



## TYPICAL USE

**Quantity:** It is usually best to gradually increase the intake of ozonated water. To begin, it is suggested to ozonate only one glass of water a day. If well tolerated, increase to two or more glasses of ozonated water daily.

**Length of Use:** 16 ounces (500 ml) or more a day for 2 to 3 months. For ongoing use, drink up to 16 ounces (500 ml) a day or as preferred. If using for an extended period, it is wise to take breaks.

## TIMING TO SATURATE WITH OZONE

One cup of cold purified water is saturated with ozone within 2 minutes to over 1,000 mV ORP (Oxidation Reduction Potential). 5-minutes is sufficient to ozonate up to 4 cups (1 quart or 1 litre) of purified water for either room temperature or ice water.

QUANTITY OF WATER	TIMED SETTING
4 cups (1 quart or 1 litre) or less	5 minutes
1 gallon or 4 litres	15 minutes
2 gallons or 8 litres	30 minutes
4 gallons or 16 litres	60 minutes

## STERILIZING WATER

The output of the Water Ozonator is sufficient to sterilize water. It does not remove impurities such as heavy metals - a water filtration system is needed for that. The amount of time required to sterilize water depends on the degree of contamination of the water. The timing in the table above is for saturation only. More time may be required to sterilize water.



## WATER DISINFECTION TESTS

Tests by two independent laboratories proved the effectiveness of the ozone generated by a SOTA Water Ozonator in killing the following virulent pathogens:

- Escherichia coli (E coli)
- Salmonella spp (typhoid fever)
- Pseudomonas aeruginosa
- Shigella spp
- Staphylococcus aureus
- Proteus mirabilis
- Klebsiella spp
- Candida spp

## ELECTRICAL SPECIFICATIONS

### POWER REQUIREMENTS

12 Volts DC @ 1.5 Amps, **Tip or Center Positive.**

**Caution:** Exceeding the voltage rating or reverse connection may result in injury or unit failure. This will **void** the warranty.

### OPTIONAL POWER INPUT

To operate the ozone generator from a 12 Volt DC source such as an automobile battery, or an appropriate solar panel, purchase a Universal Power Cord with **POSITIVE** tip.

### OUTPUT SPECIFICATIONS

Greater than 200 mg/Hr O<sub>3</sub> @ 1.5 LPM. Measured using an Ozone-in-Air GM Anseros Ozone Analyzer, Model Ozomat GM 6000-RT. Ozone concentration is 3.6 Gamma (mg/l or ug/ml) @ 0.5 LPM.

Pump outputs 0.5 PSI pressure, 2 LPM (2000 cc/min) volume.

### OZONE GENERATOR CONSTRUCTION

Uses Fused Quartz Glass ozone chamber. With normal use, the chamber should last several years.

## REPLACEMENT ACCESSORIES

To replace your accessories, please contact your supplier.



## **WARRANTY**

The Water Ozonator, WOZ4 is covered by a two (2) year limited warranty. Please keep proof of purchase. Warranty is void if the failure is due to abuse, negligence or if pure oxygen is used. SOTA reserves the right to make changes to the Water Ozonator without obligation.

## **REPAIRS**

Please contact your supplier for return instructions. Or, for information about your closest repair depot, contact [repairs@sota.com](mailto:repairs@sota.com) or

Toll-Free: 1.800.224.0242 (Canada & USA) Tel: 1.250.770.2023